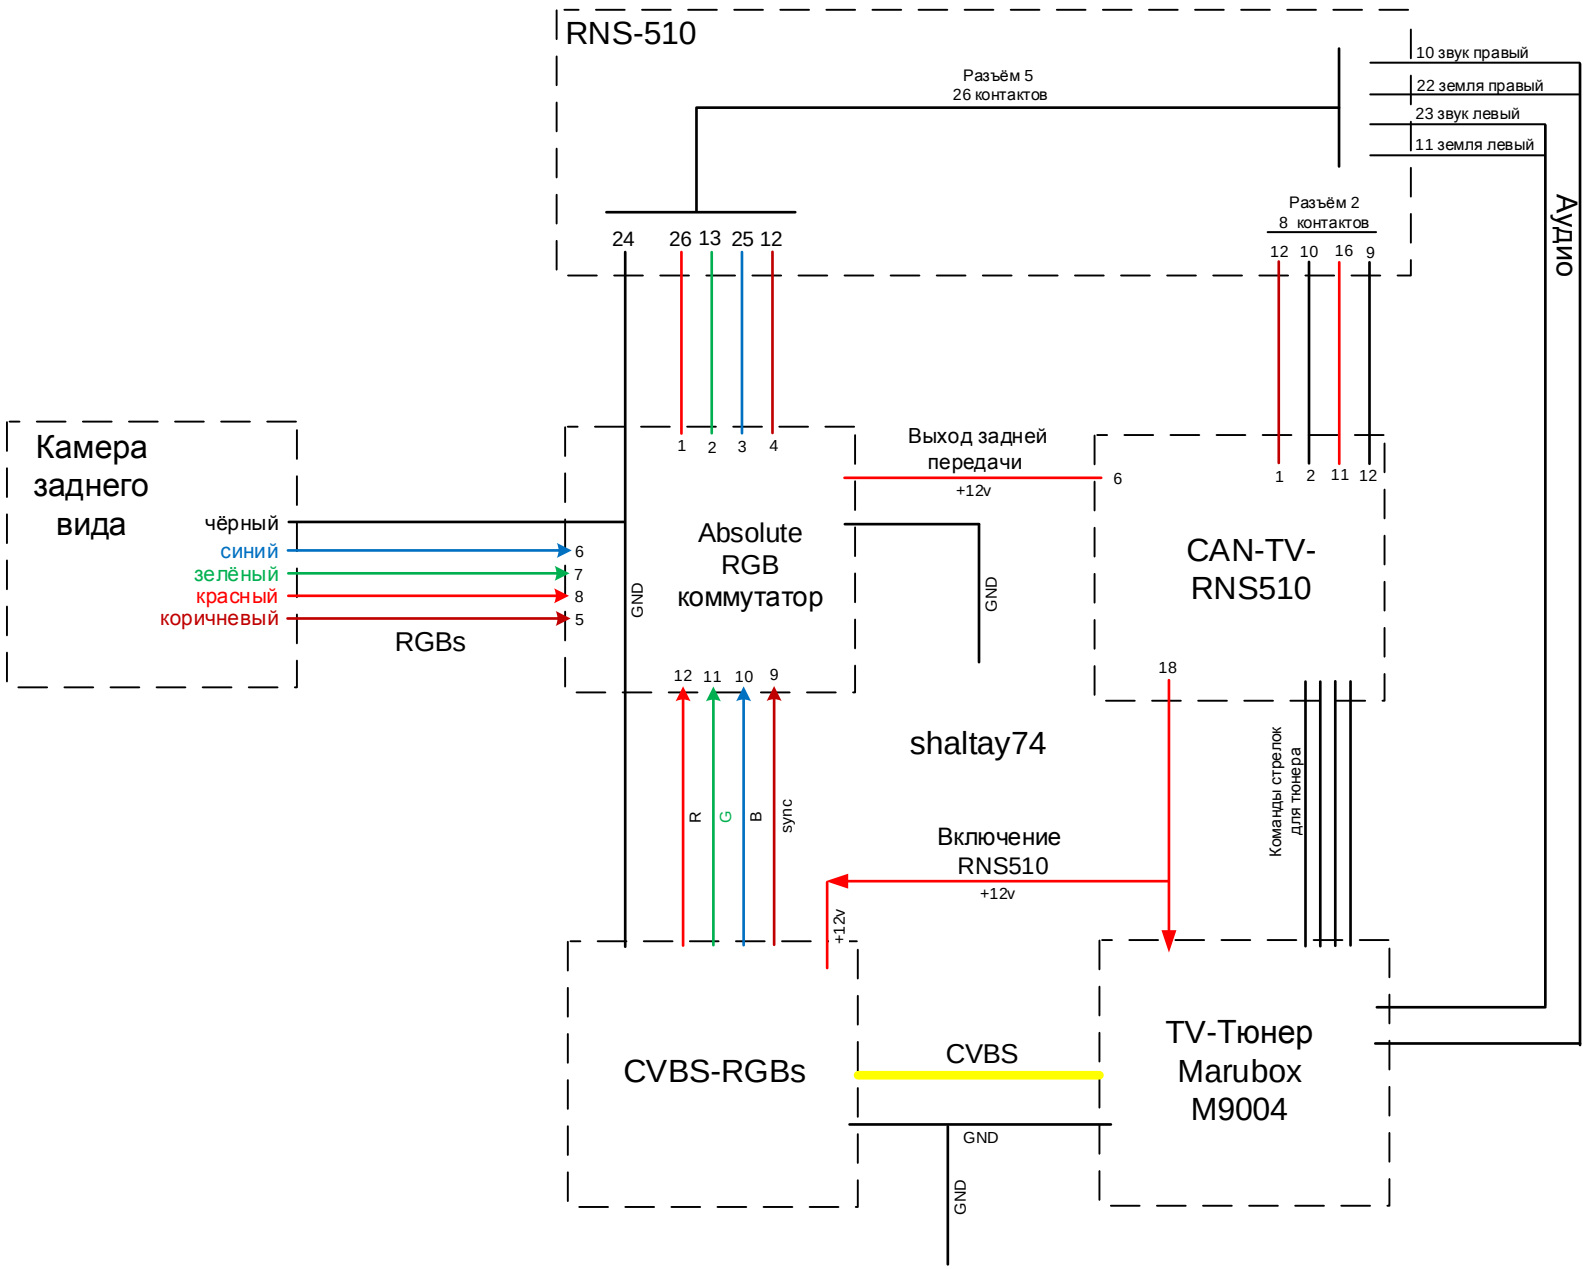
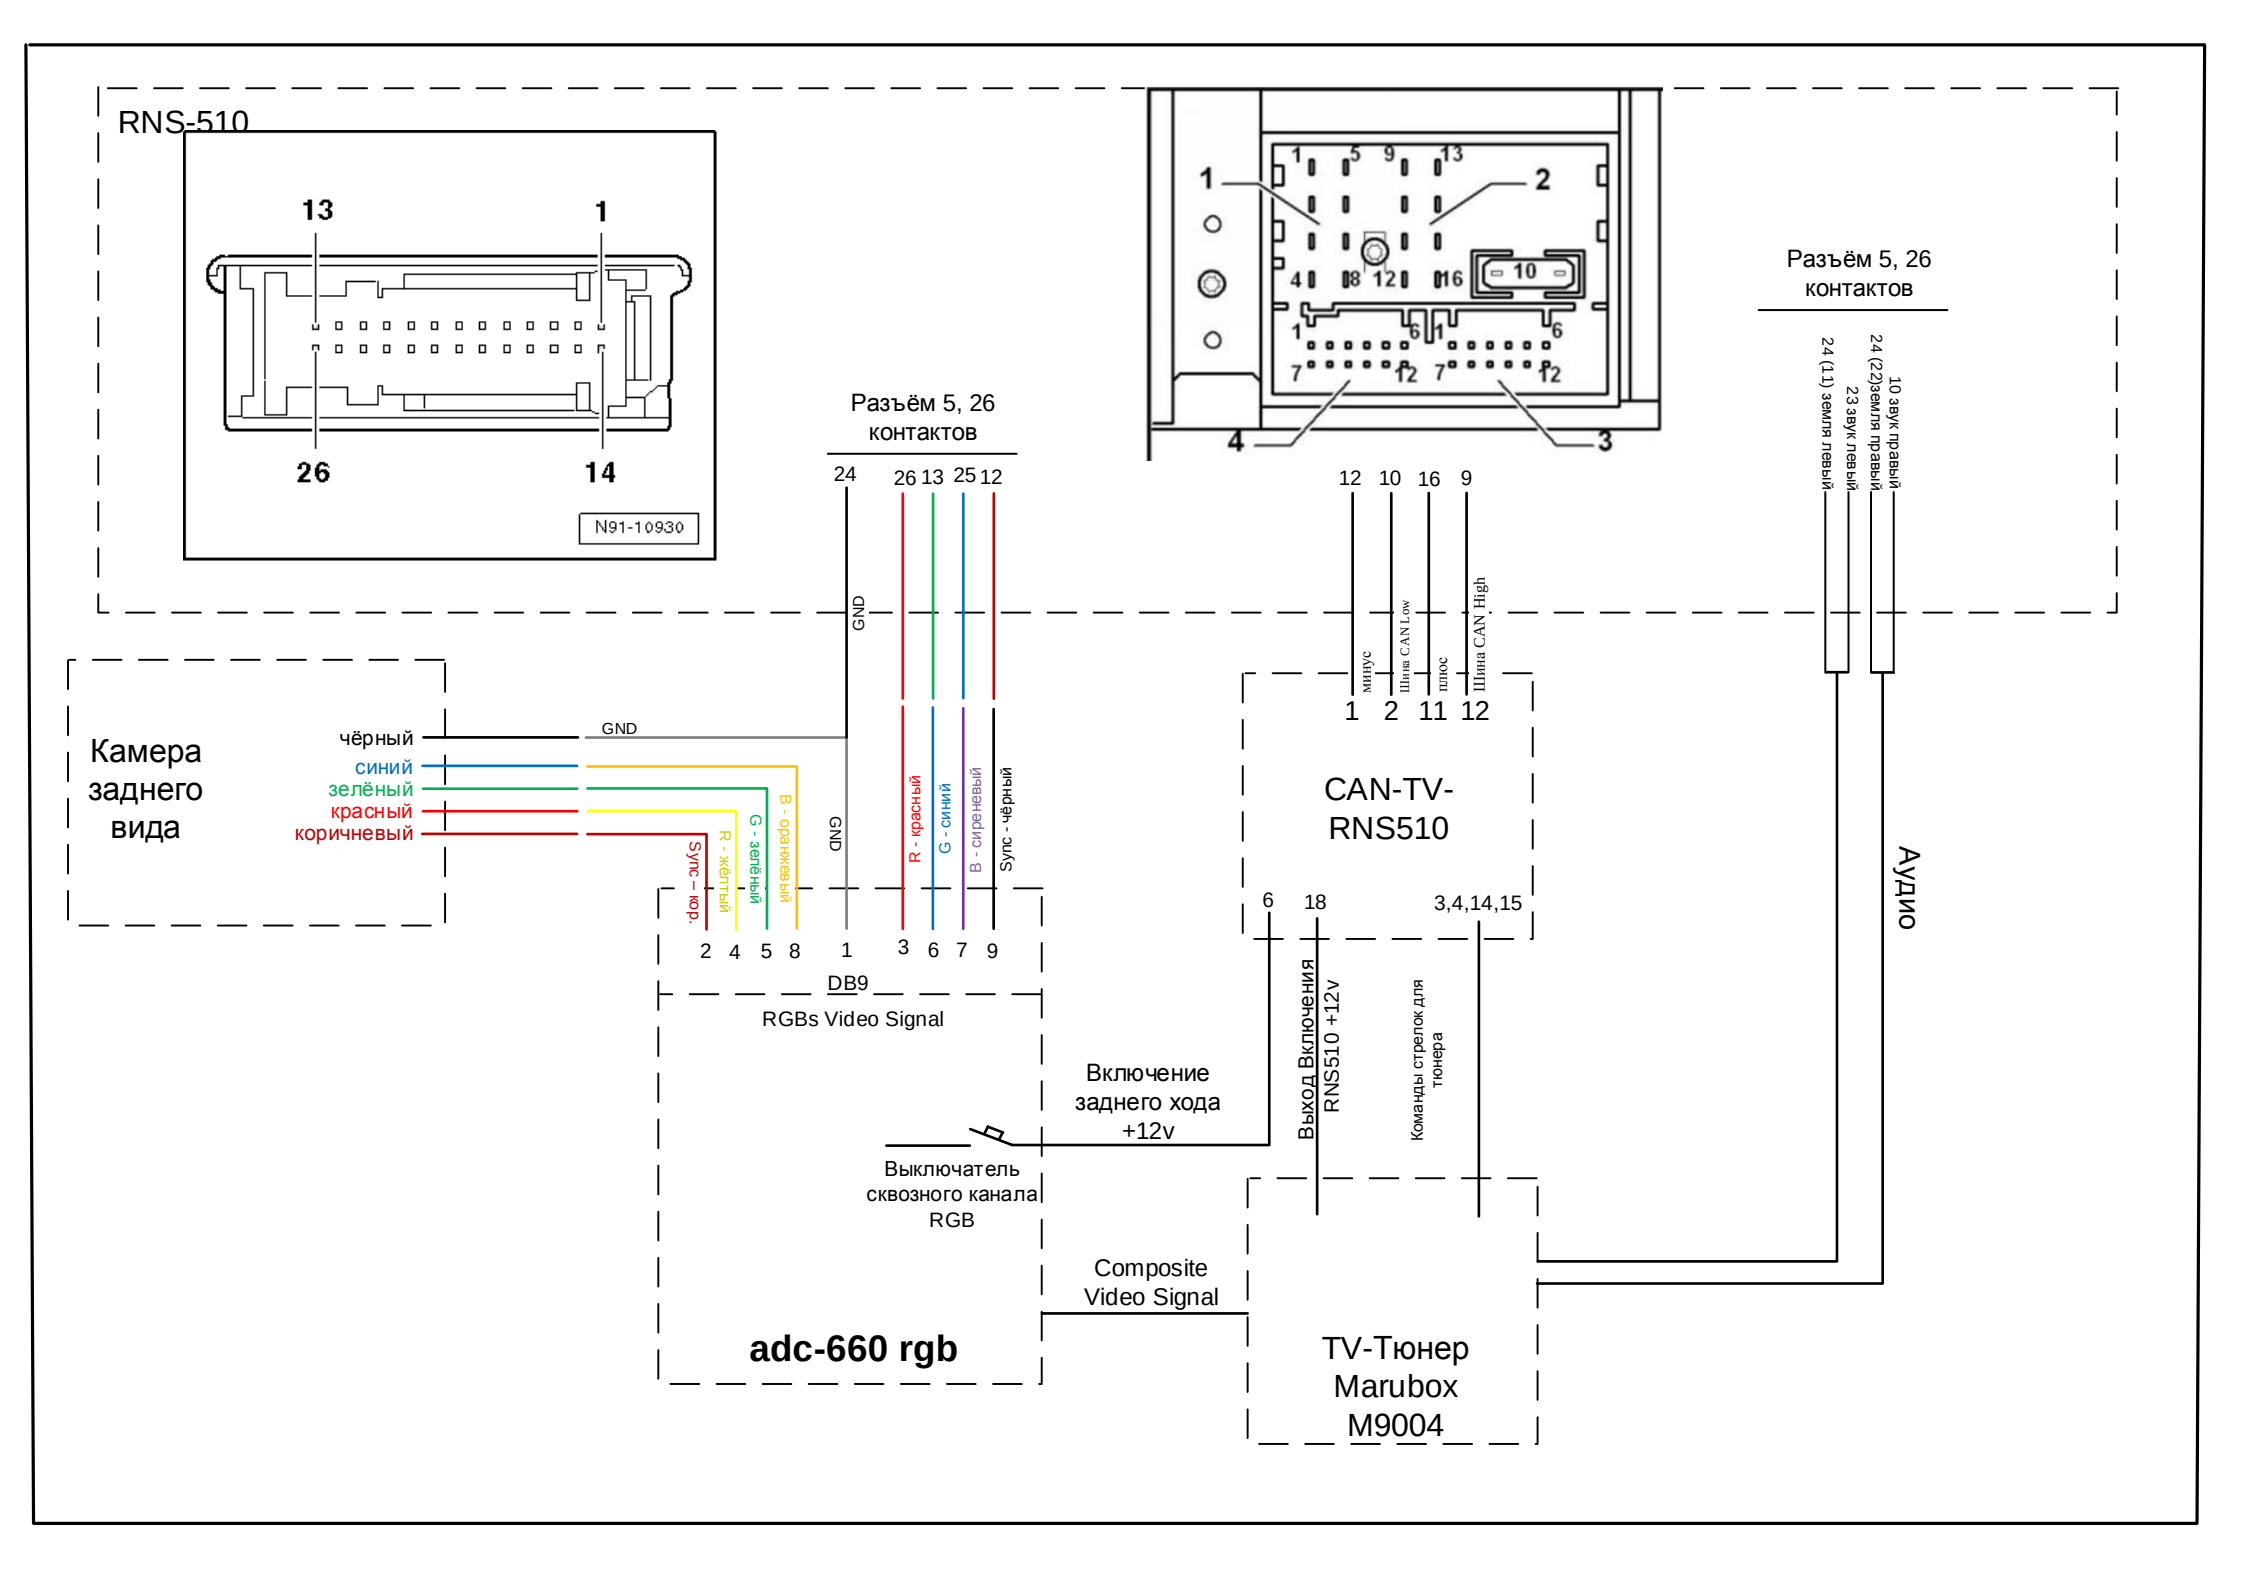

RNS-510
Разъём 5
26 контактов
10 звук правый
22 земля правый
23 звук левый
11 земля левый
Аудио
Разъём 2
8 контактов
24
26 13 25 12
12 10 16 9
1 2 3 4
1 2 11 12
Камера заднего вида
чёрный
синий
зелёный
красный
коричневый
RGBs
6
7
8
5
GND
Absolute RGB коммутатор
Выход задней передачи
+12v
6
GND
CAN-TV-RNS510
12 11 10 9
18
shaltay74
R
G
B
sync
Команды стрелок для тюнера
Включение RNS510
+12v
+12v
CVBS-RGBs
CVBS
TV-Тюнер Marubox M9004
GND
GND


RNS-510
13
1
26
14
N91-10930
Разъём 5, 26 контактов
24
26 13 25 12
GND
R - красный
G - синий
B - сиреневый
Sync - чёрный
Разъём 5, 26 контактов
12 10 16 9
минус
Шина CAN Low
плюс
Шина CAN High
1 2 11 12
24 (1) земля левый
23 звук левый
24 (22)земля правый
10 звук правый
Аудио
Камера заднего вида
чёрный
синий
зелёный
красный
коричневый
GND
B - оранжевый
G - зелёный
R - жёлтый
Sync – кор.
2 4 5 8 1 3 6 7 9
DB9
RGBs Video Signal
CAN-TV-RNS510
6 18 3,4,14,15
Выход Включения RNS510 +12v
Команды стрелок для тюнера
Включение заднего хода +12v
Выключатель сквозного канала RGB
Composite Video Signal
adc-660 rgb
TV-Тюнер Marubox M9004

Multi-pin connector 5, audio and video, 26-pin

1 – Reserved for Debug RX protocol
2 – Reserved for Debug TX protocol
3 – Not assigned
4 – Video signal input, RGBS, negative (ground)
5 – Video signal output LF, Right (Audio use 17 for ground)
6 – Ground Sync input
(Internal universal preparation for mobile telephone, mobile telephone detection)
7 – Video signal output, vertical and horizontal synchronisation
(Internal universal preparation for mobile telephone, cradle and button evaluation)
8 – Video signal ouput, green
(Internal universal preparation for mobile telephone, cradle, aerial diagnosis)
9 – Video signal input, RGBS, negative (ground)
Коричневый 10 – Video signal input LF, right (Audio use 24 for ground)
Чёрный GND 11 – Video signal input, screening earth
SYNC кор 12 – Video signal input, vertical and horizontal synchronisation –Земля чёрный–
G оранж 13 – Video signal input, green
14 – Not assigned
15 – Not assigned
16 – Not assigned
17 - Video signal output, LF, negative (ground)
ЗВУК 18 – Video signal output LF, Left (Audio use 17 for ground)
19 – Video signal output, RGBS, negative (ground)
(Internal universal preparation for mobile telephone, cradle, negative)
20 – Video signal output, Blue
(Internal universal preparation for mobile telephone, switched terminal 30)
21 – Video signal output, Red
Чёрный GND 22 – Video signal input, LF, negative
Белый 23 – Video signal input, LF, left (Audio use 24 for ground)
–Земля чёрный– 24 – Video signal input, RGBS, negative (ground)
B синий 25 – Video signal input, blue
–R зел– 26 – Video signal input, red

